Technical Data Sheet

FEATURES & BENEFITS

- Suitable for brick and masonary walls and intake or exhaust applications.
- Compatible with rainscreen applications via extended base, compensating for cavity between sheathing and brick.
- Eliminates leaky joints, while maximizing water protection with onepiece molded base and built-in drip edge.
- Integrity of the building envelope is maintained via a removable hood for simple duct cleaning.
- Over-sized flange ensures water-tight installation.
- Made with UV-protected polymer resin for lasting durability.
- Highly resistant to mechanical impact and includes a built-in bird screen.
- Quick and easy installation.

PRODUCT DIMENSIONS

HOOD SIZE: H: 7.5" / W: 8.9" / D: 5.1"

COLOURS

• Black (25)

Dark Grey (28)Taupe (23)

- Light Grey (31)
- Tan (45)
- Dark Brown (68)
- Snow White (01)

APPLICATIONS

- Heat Recovery Venting (HRV)
- Intake


- Bathroom Venting
- Range Venting


PART NUMBER/SIZING

Part #	Size	Free Area
WCXF4	4" Dia.	12.6 sq. in
WCXF5	5" Dia.	19.6 sq. in
WCXF6	6" Dia.	28.3 sq. in

Description	Pkg
Fits 4" diameter duct	9/box
Fits 5" diameter duct	9/box
Fits 6" diameter duct	9/box

TECHNICAL DRAWING

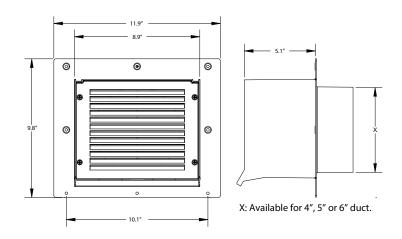



connects to 5" to 6" duct

